

FS Series

FS Femtosecond Lasers

Experience unmatched precision with Photronics Industries' FS Series Femtosecond Lasers. With ultra-short pulses (<500 fs), up to 200 W at 1030 nm, and high repetition rates up to 8 MHz, these compact lasers deliver high-efficiency performance for any application requiring speed, accuracy, or versatility. Designed for seamless integration, the FS Series delivers up to 1.5mJ single-pulse energy in a compact all-in-one design, eliminating bulky external components. It's perfect for industrial systems and advanced research.



APPLICATIONS

- UV Marking and Engraving
- Processing of Polymers and Organic Materials
- Thin Film Removal and Processing
- Polymer Cutting & Drilling
- Quantum Technology Development
- Solar Cell Manufacturing
- Semiconductor and Microelectronics Processing
- Medical Device Manufacturing


FEATURES

- Up to 1.5mJ Pulse Energy at 100kHz
- True TEM₀₀ Output
- Ultrafast Short Pulse Widths
- Burst Mode for Pulse Control
- Robust & Compact Form Factor
- Dynamic **Pulse Energy Control - PEC**
- **Position Synchronized Output - PSO**
- Power Monitoring and Self-Calibration

Specifications – FS Series				
	FS-1030-50	FS-1030-100	FS-1030-150	FS-1030-200*
Wavelength (nm) ¹	1030 ± 5			
Average Power (W) @ 1MHz	50	100	150	200
Pulse Energy (μJ) @100kHz	>250	> 700	>1100	>1500
Pulse Width ²	<550fs to 5ps		<650fs – 5ps	
Pulse repetition rate (MHz) ^{3,4}	Single shot to 2			
Pulse-to-pulse stability (RMS %) ⁵	~1			
Long-term power stability (RMS %) ⁶	<1			
Beam spatial mode [†] & M ²	TEM ₀₀ - M ² <1.3			
Beam Diameter at 1 MHz (mm)	≤2		≤2.5	
Pulse Picker Leakage (dB)	40			
Beam Roundness (%)	~90			
Beam pointing stability (μrad) [†]	<25			
Polarization ratio	>100:1			
	Operational Specifications and Characteristics			
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 30 Minutes			
Electrical requirement	32 V DC, 28 A	32V DC, 36A	32V DC, 18A / 48V DC, 16A	48V DC, 30A
Line frequency (Hz)	50-60			
Power consumption (W) ⁷	<700	<1000	<1600	<2000
Dimensions	20 x 10 x 4.25 in.	22 x 10 x 4.25in	24 x 12 x 4.5in	24 x 14 x 4.5 in
Weight	60lbs [~27kg]	~65lbs [~29.5kg]	~73lbs [33.1kg]	~90lbs [41kg]
	Environmental Requirements			
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system ⁸	Water-Cooled			


[1.] Multi-wavelength options are available. Contact us. [2.] Specifiable pulse width. [3.] Lower repetition rates, down to single shot, achieved by utilizing PSO. [4.] Fixed pulse repetition rate at ~32 MHz available on request. [5.] Measured at ambient temperature ± 2°C. [6.] Measured over 8 hours ± 1°C. [7.] Power consumption data does not include an external chiller's power consumption. [8.] Air-cooled option available for low power FS Series models. Please contact us for more information. [†] Tested with laser mounted horizontally. [NB] All specifications are at the optimized repetition rate. [*] For Dimensional Drawing, please contact PI

Typical Beam Profile

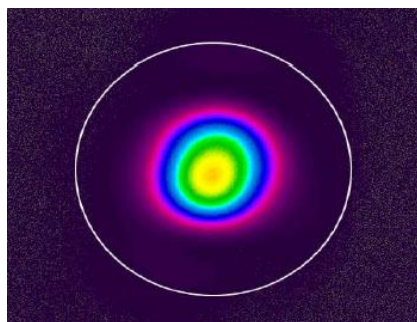

FS-1030-100 @ 1MHz

Power Vs. PRF

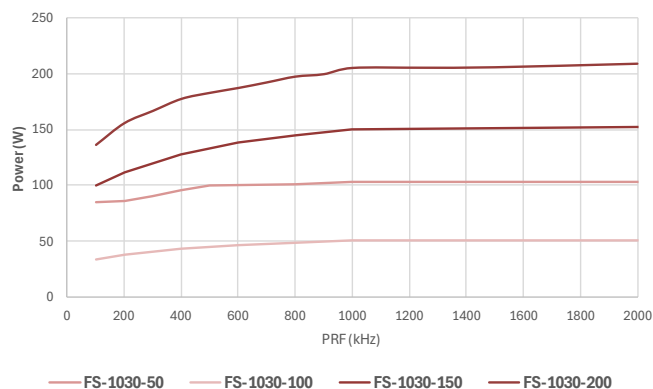


Specifications – FS Series				
	FS-515-25	FS-515-50	FS-515-75	FS-515-100*
Wavelength (nm) ¹	515 ± 3			
Average Power (W) @ 1MHz	25	50	75	100
Pulse Energy (μJ) @100kHz	>125	>350	>550	>750
Pulse Width ²	<550fs to 5ps		<650fs – 5ps	
Pulse repetition rate (MHz) ^{3,4}	Single shot to 2			
Pulse-to-pulse stability (RMS %) ⁵	~1			
Long-term power stability (RMS %) ⁶	≤1			
Beam spatial mode [†] & M ²	TEM ₀₀ - M ² <1.3			
Beam Diameter at 1 MHz (mm)	≤2		≤2.5	
Pulse Picker Leakage (dB)	40			
Beam Roundness (%)	~90			
Beam pointing stability (μrad) [†]	~25			
Polarization ratio	>100:1			
	Operational Specifications and Characteristics			
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 30 Minutes			
Electrical requirement	32 V DC, 28 A	32V DC, 36A	32V DC, 18A / 48V DC, 16A	48V, 30A
Line frequency (Hz)	50-60			
Power consumption (W) ⁷	<700	<1000	<1.5	<2
Dimensions	20 x 10 x 4.25 in.	22 x 10 x 4.25 in.	24 x 12 x 4.5in	24 x 14 x 4.5
Weight	60lbs [~27kg]	65lbs [~29.5kg]	~73lbs [33.1kg]	~90lbs [41kg]
	Environmental Requirements			
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system ⁸	Water-Cooled			

[1.] Multi-wavelength options are available. Contact us. [2.] Specifiable pulse width. [3.] min PRF for standard model is 1 MHz, custom min PRF down to 100 kHz is available.

Lower repetition rates, down to single shot, achieved by utilizing PSO. [4.] Fixed pulse repetition rate at ~32 MHz available on request. [5.] Measured at ambient temperature ± 2°C.


[6.] Measured over 8 hours ± 1°C. [7.] Power consumption data does not include an external chiller's power consumption. [8.] Air-cooled option available for low power FS Series models. Please contact us for more information. [†] Tested with laser mounted horizontally. [NB] All specifications are at the optimized repetition rate. [*] For Dimensional Drawing, please contact PI

Typical Beam Profile

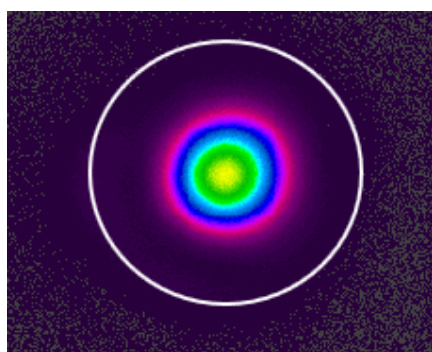

FS-515-25 @ 1MHz


Power Vs. PRF

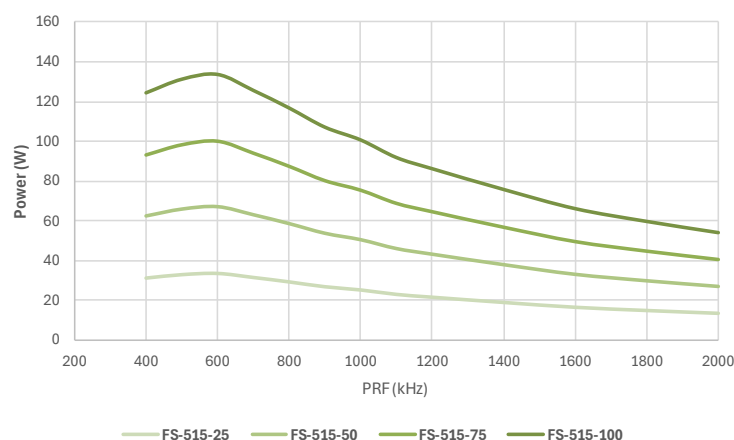

Specifications – FS Series				
	FS1-343-10	FS-343-25	FS-343-50	FS-343-60 *
Wavelength (nm) ¹	343 ± 2			
Average Power (W) @ 1MHz	10	25	45	60
Pulse Energy (μJ) @1MHz	10	25	45	60
Pulse Width ²	<550fs to 5ps		<650fs to 5ps	
Pulse repetition rate (MHz) ^{3,4}	Single shot to 2			
Pulse-to-pulse stability (RMS %) ⁵	~1			
Long-term power stability (RMS %) ⁶	≤1			
Beam spatial mode [†] & M ²	TEM ₀₀ - M ² <1.3			
Pulse Picker Leakage (dB)	40			
Beam Roundness (%)	~90			
Beam pointing stability (μrad) [†]	<25			
Polarization ratio	>100:1			
	Operational Specifications and Characteristics			
Interface	RS232, Ethernet, Software GUI, External TTL Triggering			
Warm-up time	< 30 Minutes			
Electrical requirement	32 V DC, 28 A	32V DC, 36A	32V DC, 18A / 48V DC, 16A	48V, 30A
Line frequency (Hz)	50-60			
Power consumption (W) ⁷	<600	<900	<1.5	<2
Dimensions	26 x 10 x 4.25 in.	26 x 10 x 4.25 in.	28 x 12 x 4.5in	28 x 14 x4.5in
Weight	60lbs [~27kg]	65lbs [~29.5kg]	~73lbs [33.1kg]	~90lbs [41kg]
	Environmental Requirements			
Ambient temperature ²	Ambient 15°C to 30°C (59°F to 86°F) Operating Range			
	Relative humidity 0% to 80% max, non-condensing			
Storage conditions	-10°C to 40°C; sea level to 12000 m			
	0% to 80% relative Humidity, non-condensing			
Cooling system ⁸	Water-Cooled			


[1.] Multi-wavelength options are available. Contact us. [2.] Specifiable pulse width. [3.] Lower repetition rates, down to single shot, achieved by utilizing PSO. [4.] Fixed pulse repetition rate at ~32 MHz available on request. [5.] Measured at ambient temperature ± 2°C. [6.] Measured over 8 hours ± 1°C. [7.] Power consumption data does not include an external chiller's power consumption. [8.] Air-cooled option available for low power FS Series models. Please contact us for more information. [†] Tested with laser mounted horizontally. [NB] All specifications are at the optimized repetition rate. [*] For Dimensional Drawing, please contact PI

Power Vs. PRF

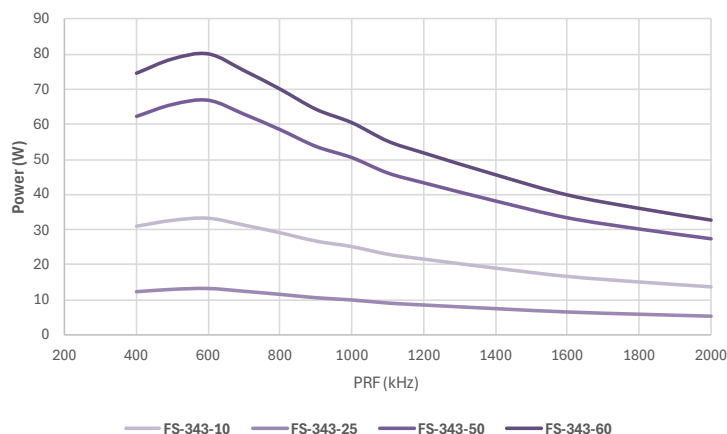



Dimensional Drawings

FS-1030-50, FS-515-25, FS-343-10

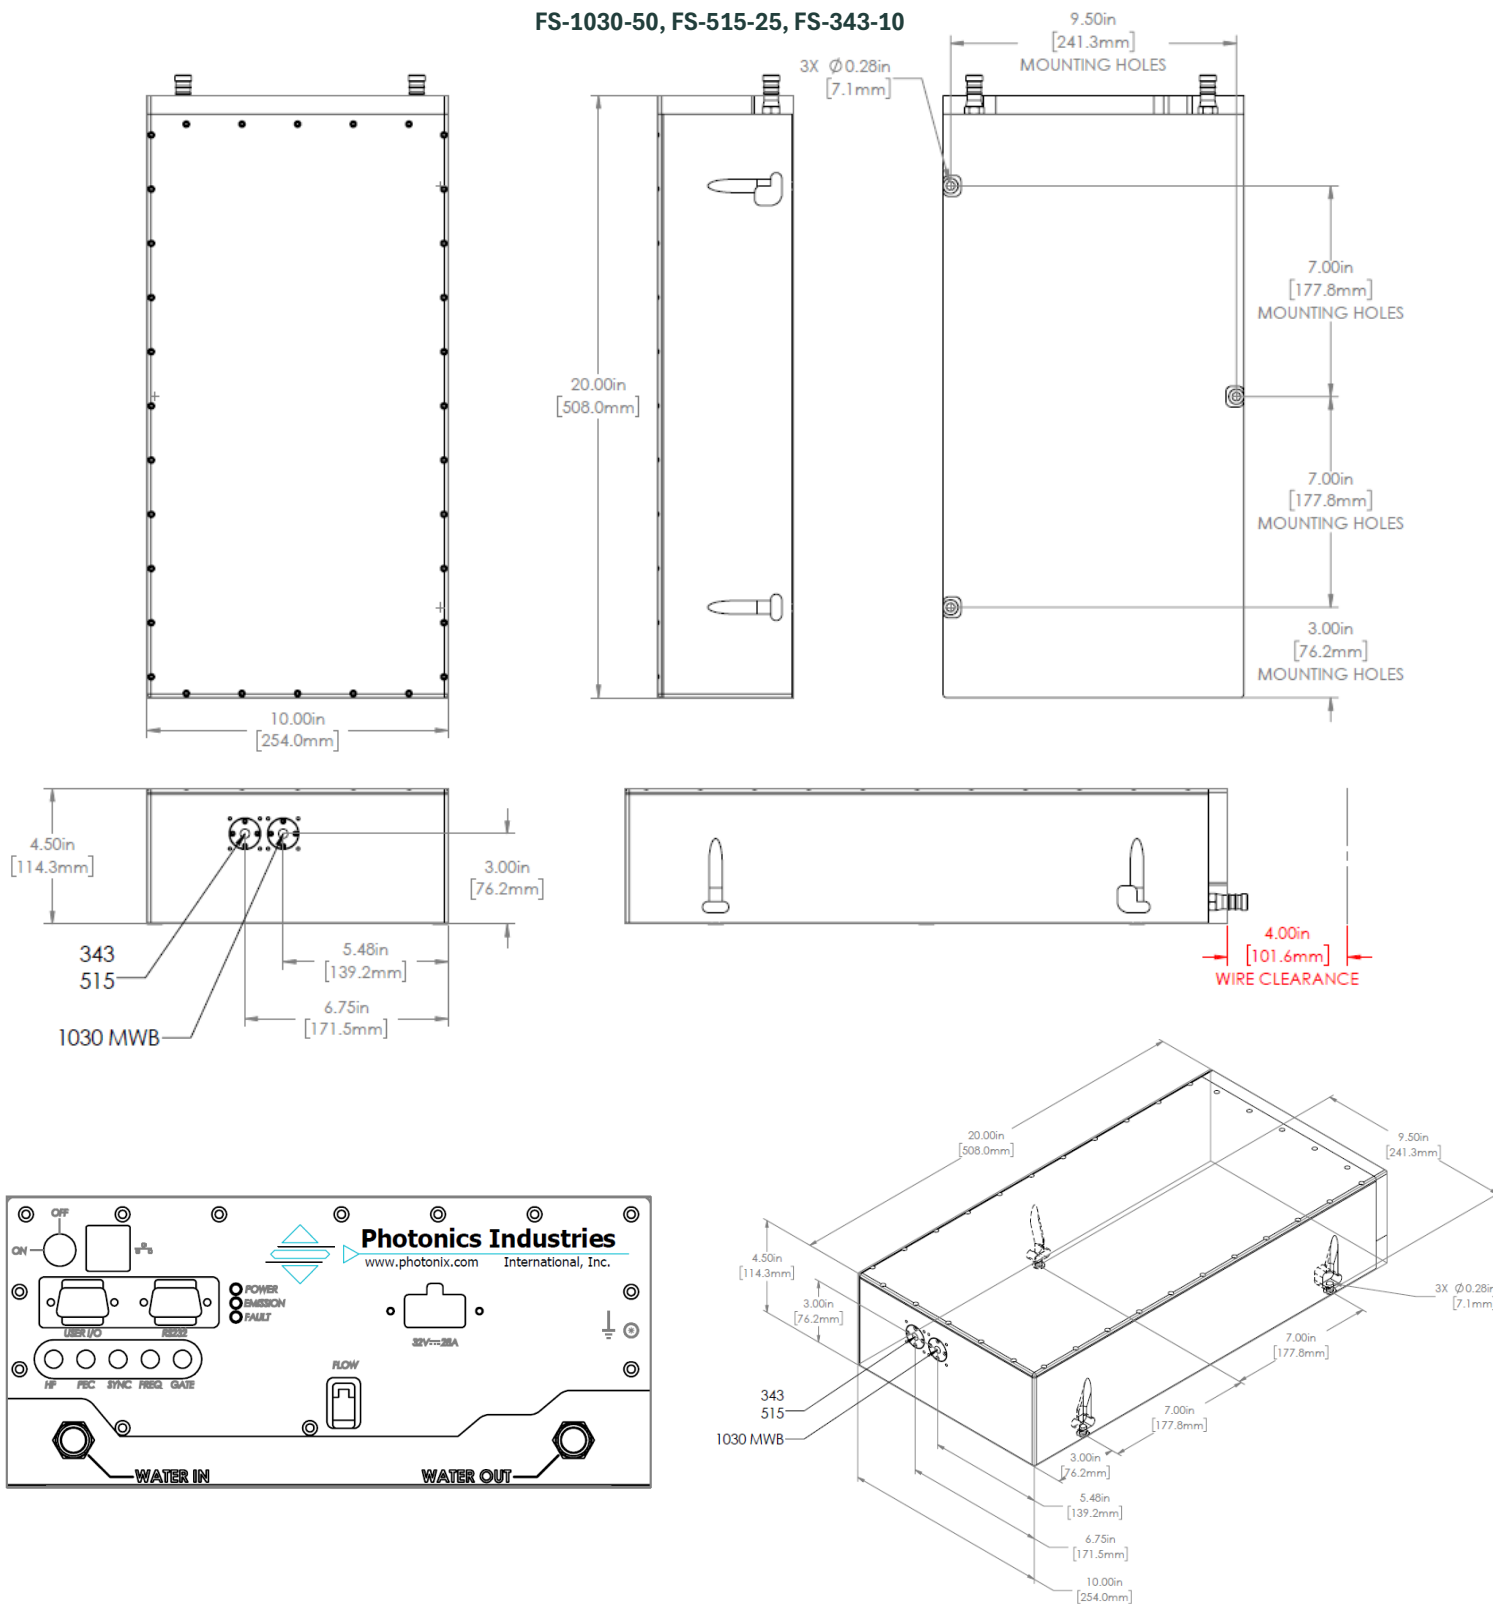



Dimensional Drawings

FS-1030-100, FS-515-50, FS-343-25

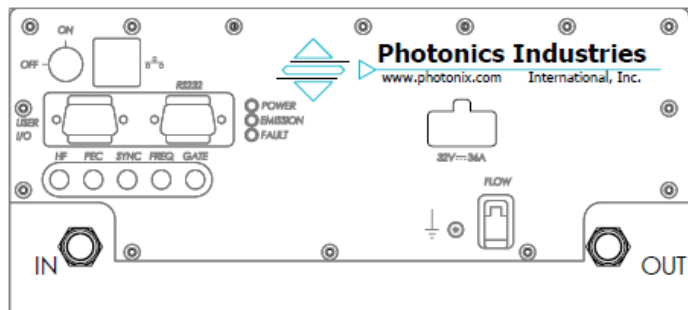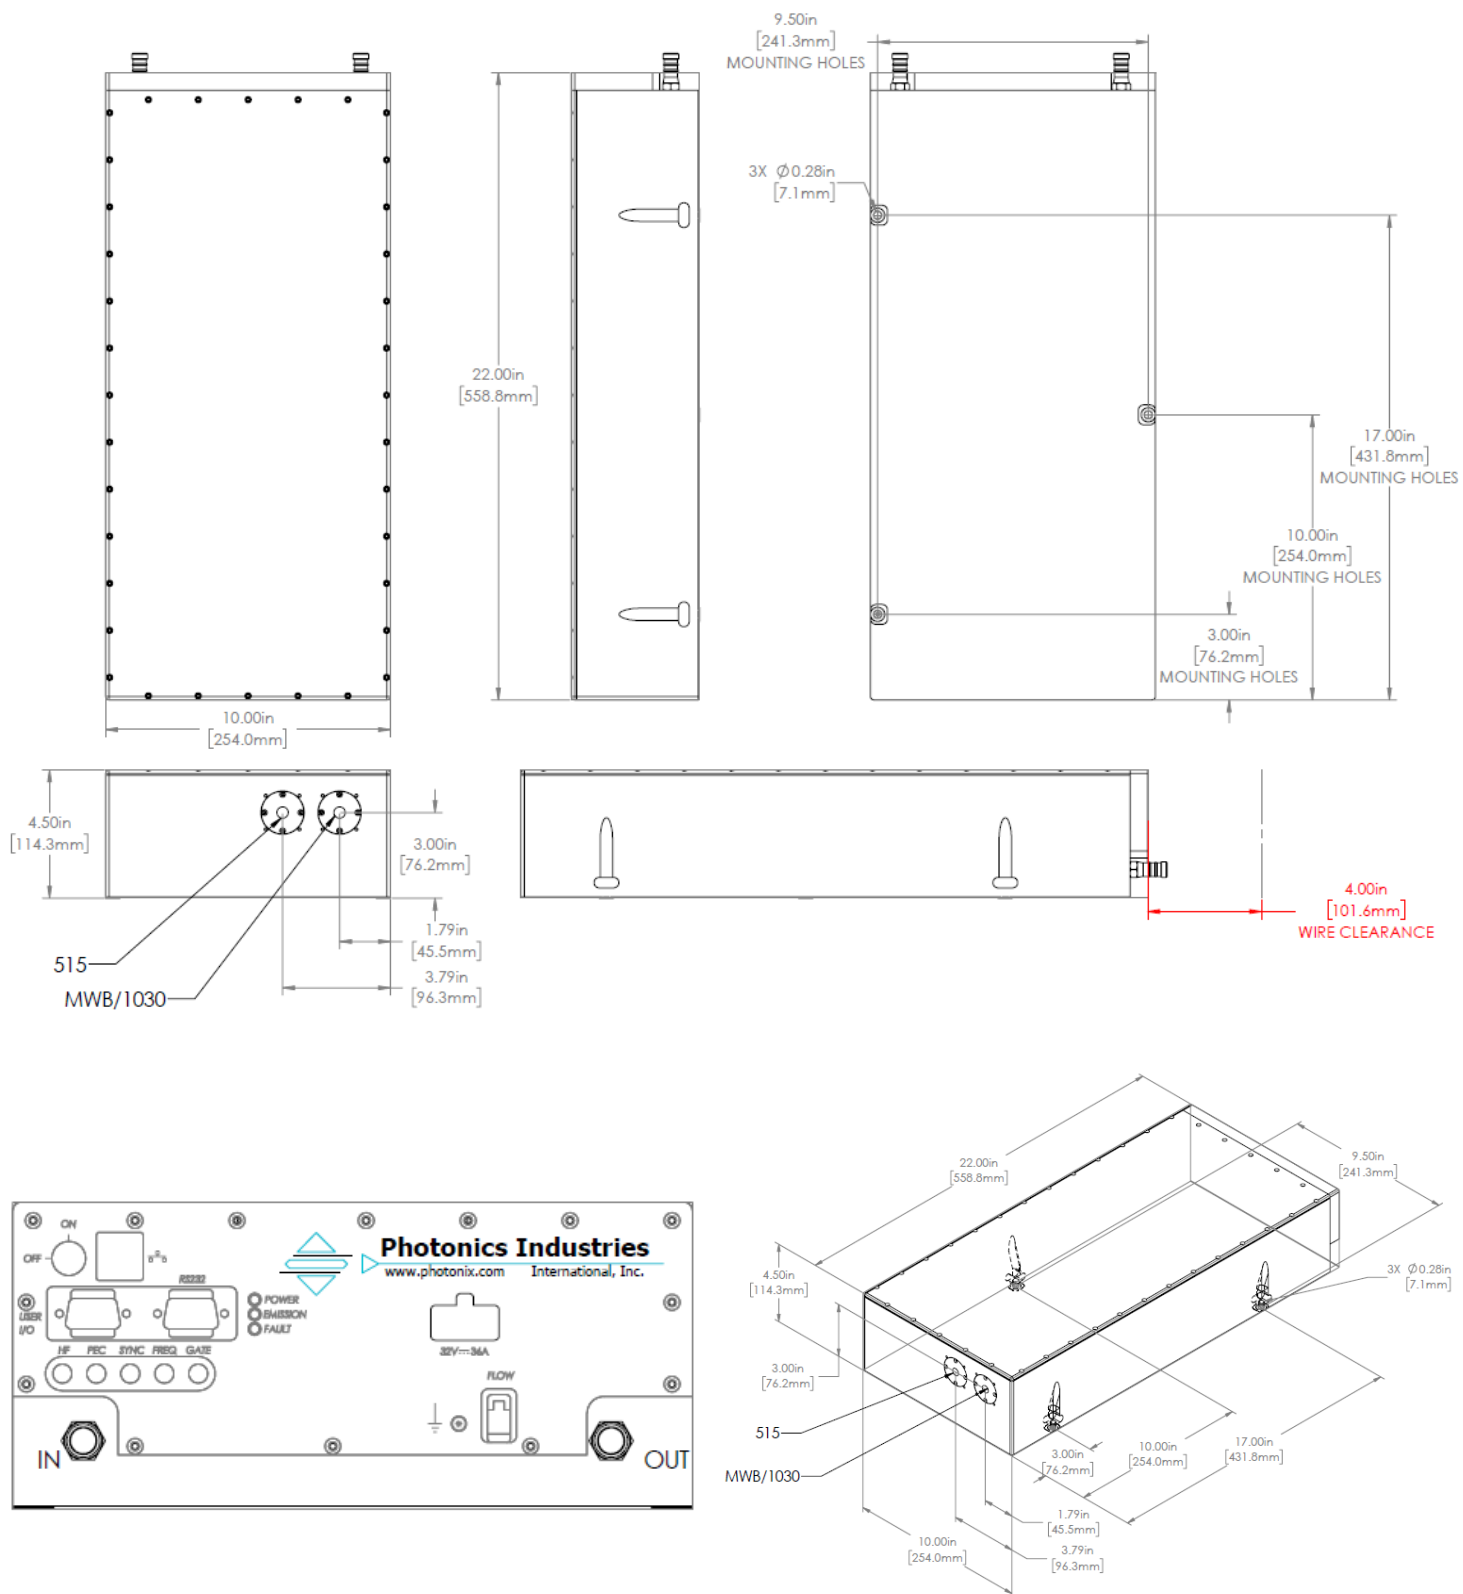

Dimensional Drawings

FS-1030-150, FS-515-100, FS-343-50

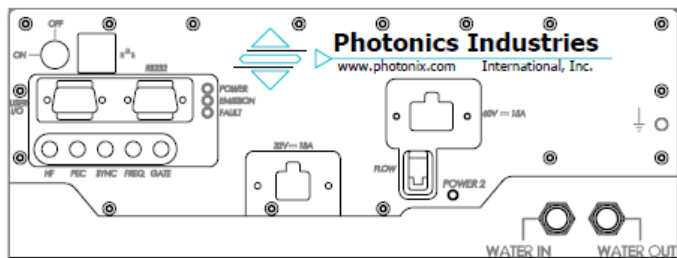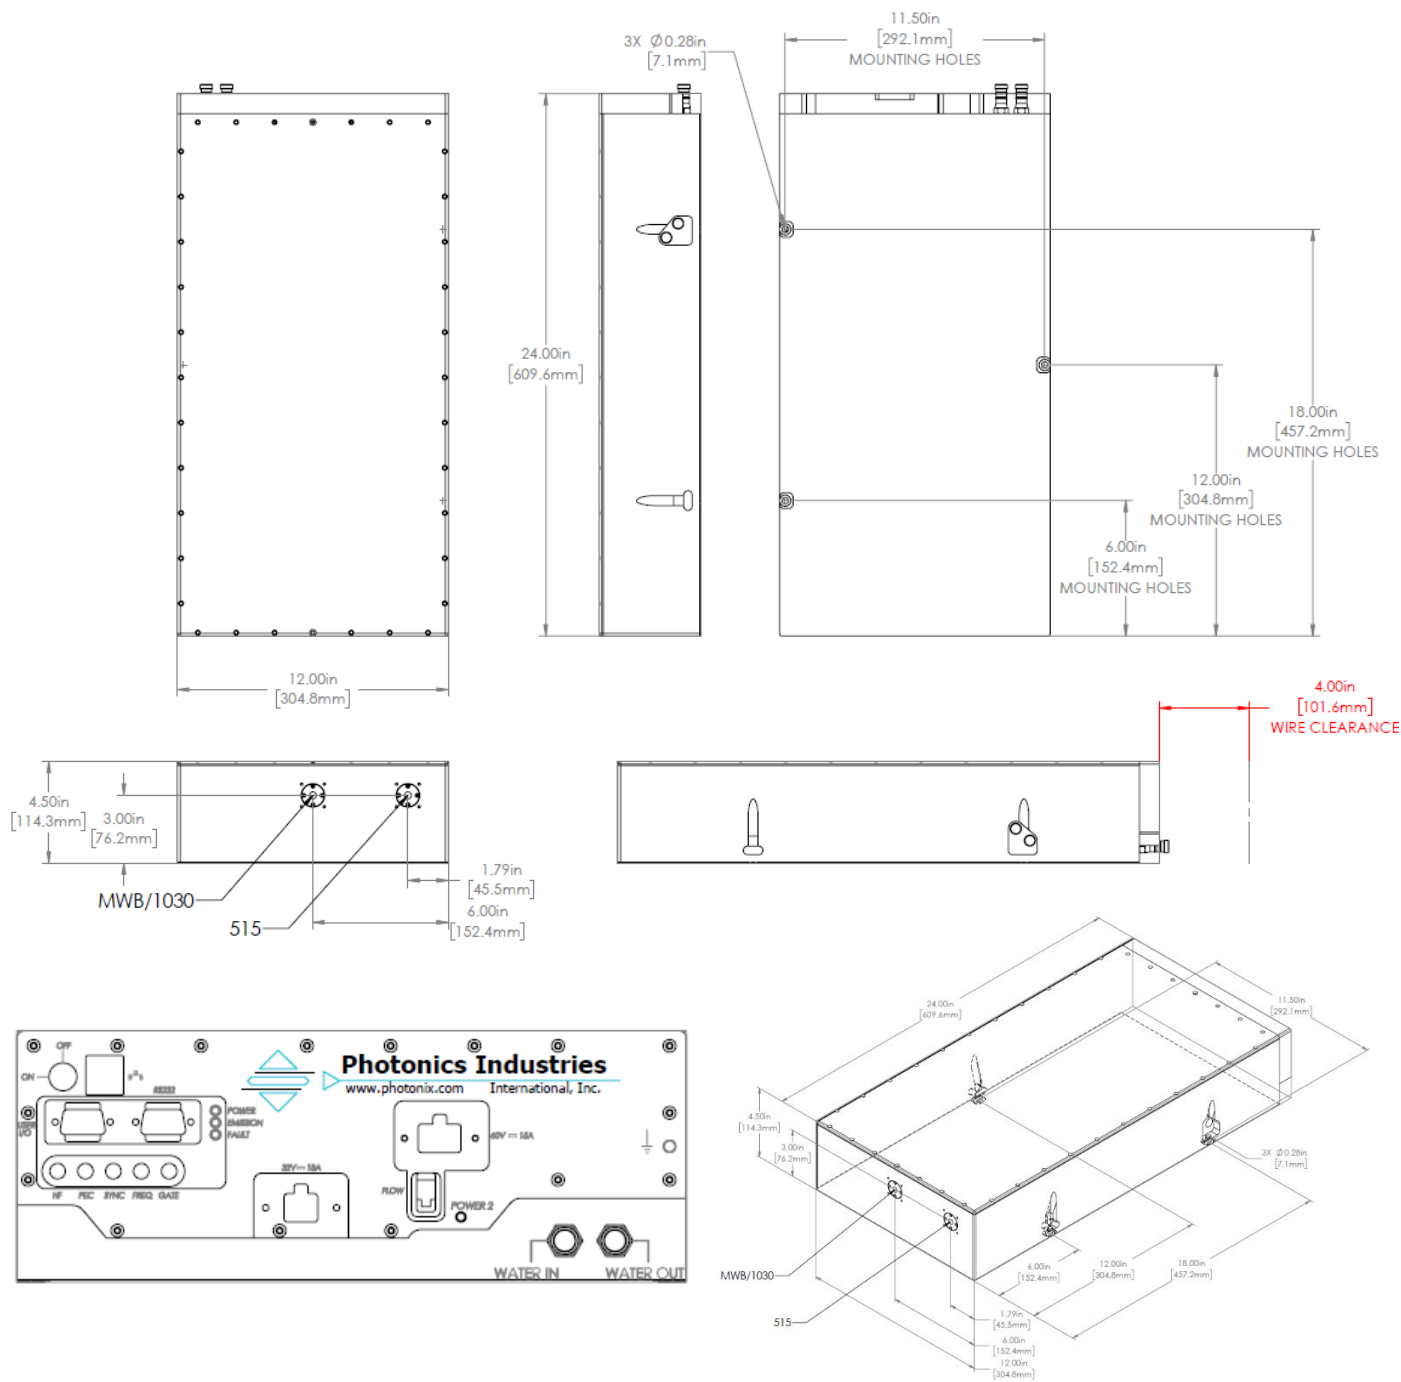

Our ongoing policy is to improve the design and specification of our products. The information provided is non-binding.

© 2025 Photonics Industries International, Inc.

Headquarters: 1800 Ocean Ave, Ronkonkoma, New York 11779, United States

Photonics Industries International Inc. is the pioneer of intracavity harmonic lasers and is at the forefront of developing, manufacturing, and marketing a wide range of nanosecond, sub-nanosecond, picosecond, and femtosecond lasers for the industrial, scientific, defense and medical industries.

For more information www.photonix.com